

# STORAGE CABINETS


The storage cabinets ensure the orderly and safe storage of drums and containers and are equipped with containment solutions in the event of spillage or leaks. They are available both in the traditional version of cabinet with hinged doors, and in more particular models such as cabinets installed on tanks or cabinets with walls with rock wool and fire resistance. For the organisation of PPE and fire-fighting materials on the other hand, slotted-door cabinets are available, inclusive of a safe crash insert which is easy to break in case of an emergency.



CAPACITY FROM 200  
TO 300 LITRES




CAPACITY  
1200 KG



SLOTTED  
DOORS



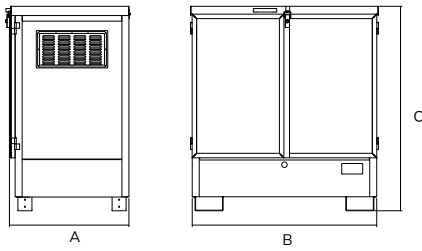


SHELF  
ART. 015191



2-DRUM CABINET WELDED ON SPILL PALLET WITH OPENING ROOF

ART.	dimensions mm			RAL	capacity in litres
	A	B	C		
012855	1350	850	1465	2004	200

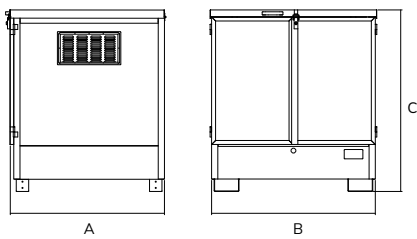


SHELF  
ART. 014064



4-DRUM CABINET WELDED ON SPILL PALLET WITH OPENING ROOF

ART.	dimensions mm			RAL	capacity in litres
	A	B	C		
012824	1315	1240	1465	2004	300

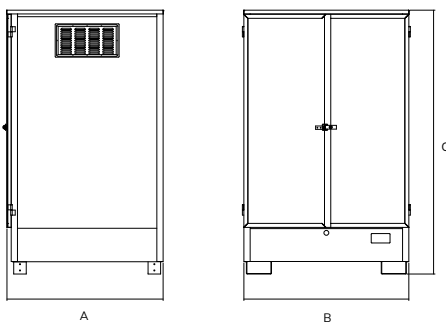

SHELF  
ART. 014064

The internal height is necessary to allow the use of decanting pumps or funnels.




4-DRUM CABINET WELDED ON SPILL PALLET WITH FIXED ROOF

ART.	dimensions mm			RAL	capacity in litres
	A	B	C		
013722	1315	1250	2100	2004	300



## STORAGE CABINETS

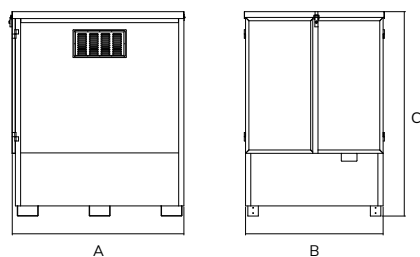


PATENTED\*



1-TANK CABINET WELDED ON SPILL PALLET WITH OPENING ROOF

ART.	dimensions mm			RAL	capacity in litres
	A	B	C		
013883	1315	1645	1570	2004	1000

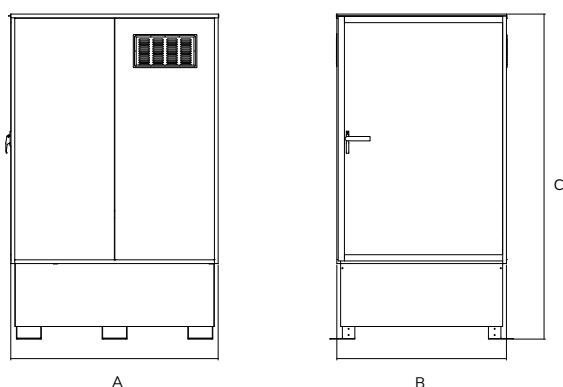

PATENTED\*



1-TANK CABINET WELDED ON SPILL PALLET WITH FIXED ROOF FOR SLANTED FRAME

ART.	dimensions mm			RAL	capacity in litres
	A	B	C		
013739	1360	1665	2600	2004	1000



CABINET WITH SLOTTED HINGED DOORS

ART.	dimensions mm			type of cabinet	RAL	load capacity kg
	W	D	H			
005659	1048	600	1027	for flammable products	1004	800
005666	1048	600	1027	for pesticides	6011	800

- 1 cabinet with slotted hinged doors
- 1 slotted shelf
- 1 external watertight liquid spill pallet capacity 59 l



CABINET WITH SLOTTED HINGED DOORS

ART.	dimensions mm			type of cabinet	RAL	load capacity kg
	W	D	H			
005680	1048	600	2027	for flammable products	1004	1200
005697	1048	600	2027	for pesticides	6011	1200

- 1 cabinet with slotted hinged doors
- 1 kit of 3 slotted shelves
- 1 external watertight liquid spill pallet capacity 59 l

**ACCESSORIES**  
ON REQUEST



SLOTTED SHELF



INTERNAL WATERTIGHT TRAY

## STORAGE CABINETS

The cabinet is equipped with a patented automatic shelf tilting system which, in the event of a fire, slides the stored batteries into the tank installed at the base of the cabinet. Inside the tank, the batteries will be immersed in water which immediately extinguishes the fire and also excludes the possibility of new self-combustion.



CABINET FOR LITHIUM BATTERY STORAGE

ART.	dimensions mm			RAL
	W	D	H	
006618	1200	600	1950	5010

- 1 and 1.5 mm steel cabinet, powder-coated, insulated with fibre-ceramic panels and spill pallet on the bottom
- Hydraulic closing of doors at temperatures above 47 °C
- Automatic shut-off valves (70 °C) of the air intake and outlet ducts, certified 90 minutes, located on the top and bottom of the cabinet
- Pictograms standardised according to ISO 3864

**CERTIFIED 90 MINUTES.**

2 DOORS WITH KEY LOCK, 3 SHELVES.

COMPLIES WITH EN61010-1, EN 161221, CEI 66-5 STANDARDS.





## CABINET FOR THE STORAGE OF ACIDS AND BASES

ART.	dimensions mm			RAL
	W	D	H	
<b>006137</b>	600	600	1950	7035

- Made of electro-galvanised steel sheet (Skin passat) FE P01 thickness 10/10 mm
- Hollow-core and reversible doors made of the same materials, complete with handles with safety latches and locks
- Brand electric extractor with self-extinguishing technopolymer case, antistatic resistant to corrosive agents
- Height-adjustable steel tray shelves for containing liquids in the event of breakage or spillage from containers
- Pictograms standardised according to ISO 3864

2 COMPARTMENTS, 4 SHELVES 600x600 mm.  
COMPLIES WITH EN 61010-1, EN 1 61221, CEI 66-5 STANDARDS.



## CABINET FOR THE STORAGE OF ACIDS AND BASES

ART.	dimensions mm			RAL
	W	D	H	
<b>006649</b>	1140	600	1950	7035

- Made of electro-galvanised steel sheet (Skin passat) FE P01 thickness 10/10 mm
- Hollow-core and reversible doors made of the same materials, complete with handles with safety latches and locks
- Brand electric extractor with self-extinguishing technopolymer case, antistatic resistant to corrosive agents
- Height-adjustable steel tray shelves for containing liquids in the event of breakage or spillage from containers
- Pictograms standardised according to ISO 3864

2 DOORS WITH KEY LOCK, 3 SHELVES.  
COMPLIES WITH EN61010-1, EN 161221, CEI 66-5 STANDARDS.





CABINET FOR THE STORAGE OF ACIDS AND BASES

ART.	dimensions mm			RAL
	W	D	H	
<b>006625</b>	600	600	1950	7035

- Made of electro-galvanised steel sheet (Skin passat) FE P01 thickness 10/10 mm
- Hollow-core and reversible doors made of the same materials, complete with handles with safety latches and locks
- Brand electric extractor with self-extinguishing technopolymer case, antistatic resistant to corrosive agents
- Fuse protection: 5x20 mm rapid flow 1A
- Extractor capacity: 275 m<sup>3</sup>/h.
- Power supply: 220/230 V-50 Hz single-phase
- Absorption: 55 W
- Filter in active carbon mounted at the top, suitable for acids, with pre-filter. Easy filter replacement behind the hinged panel with key lock
- Height-adjustable steel tray shelves for containing liquids in the event of breakage or spillage from containers
- Pictograms standardised according to ISO 3864
- Multi-language safety signs indicate the presence of dangerous and toxic products to highlight the contents and limits of conservation

1 DOOR WITH KEY LOCK, 3 SHELVES, WITH ELECTRIC EXTRACTOR.  
COMPLIES WITH EN 61010-1, EN 1 61221, CEI 66-5 STANDARDS.



CABINET FOR THE STORAGE OF ACIDS AND BASES

ART.	dimensions mm			RAL
	W	D	H	
<b>006632</b>	1140	600	1950	7035

- Made of electro-galvanised steel sheet (Skin passat) FE P01 thickness 10/10 mm
- Hollow-core and reversible doors made of the same materials, complete with handles with safety latches and locks
- Brand electric extractor with self-extinguishing technopolymer case, antistatic resistant to corrosive agents
- Fuse protection: 5x20 mm, rapid flow 1A
- Extractor capacity: 275 m<sup>3</sup>/h.
- Power supply: 220/230 V-50 Hz single-phase
- Absorption: 55 W
- Filter in active carbon mounted at the top, suitable for acids, with pre-filter. Easy filter replacement behind the hinged panel with key lock
- Height-adjustable steel tray shelves for containing liquids in the event of breakage or spillage from containers
- Pictograms standardised according to ISO 3864
- Multi-language safety signs indicate the presence of dangerous and toxic products to highlight the contents and limits of conservation

2 DOORS WITH KEY LOCK, 3 SHELVES, WITH ELECTRIC EXTRACTOR.  
COMPLIES WITH EN 61010-1, EN 1 61221, CEI 66-5 STANDARDS.





CABINET FOR STORAGE OF FLAMMABLE PRODUCTS

ART.	dimensions mm			RAL
	W	D	H	
006663	600	600	1950	7035

- Made of sheet steel with thicknesses of 1 - 1.5 mm
- Insulation consisting of high-density rock wool fibreboards (free of fibre-ceramics) for high temperatures (800 °C) and calcium sulphate panels. Internal finishing panels in melamine laminate with high resistance to even aggressive vapours.
- Certification according to the new EN 14470-1.v standard
- Automatic door closing at ambient temperatures above 50 °C
- Automatic shut-off valves (70 °C) of the air intake and outlet ducts, certified 90 minutes, located on the top and bottom of the cabinet
- Expulsion hole diameter 100 mm on the roof of the cabinet
- Non-sparking hinge in natural iron with brass pin
- Thermo expanding gasket 3 cm (DIN 4102)
- Height-adjustable painted steel tray shelves with a load capacity of 80 kg
- Painted steel bottom tank with support grille
- "Earth" clamp to prevent electrostatic charges

**CERTIFIED 90 MINUTES.**

1 DOOR WITH KEY LOCK, 3 SHELVES.

COMPLIES WITH EN 61010-1, EN 1 61221, CEI 66-5 STANDARDS.



CABINET FOR STORAGE OF FLAMMABLE PRODUCTS

ART.	dimensions mm			RAL
	W	D	H	
006656	1200	600	1950	7035

- Made of sheet steel with thicknesses of 1 - 1.5 mm
- Insulation consisting of high-density rock wool fibreboards (free of fibre-ceramics) for high temperatures (800 °C) and calcium sulphate panels. Internal finishing panels in melamine laminate with high resistance to even aggressive vapours.
- Certification according to the new EN 14470-1.v standard
- Automatic door closing at ambient temperatures above 50 °C
- Automatic shut-off valves (70 °C) of the air intake and outlet ducts, certified 90 minutes, located on the top and bottom of the cabinet
- Expulsion hole diameter 100 mm on the roof of the cabinet
- Non-sparking hinge in natural iron with brass pin
- Thermo expanding gasket 3 cm (DIN 4102)
- Height-adjustable painted steel tray shelves with a load capacity of 80 kg
- Painted steel bottom tank with support grille
- "Earth" clamp to prevent electrostatic charges

**CERTIFIED 90 MINUTES.**

2 DOORS WITH KEY LOCK, 3 SHELVES.

COMPLIES WITH EN61010-1, EN 161221, CEI 66-5 STANDARDS.

